


ISSUE	REVISION	DATE	DRAWN
B	CADIZED	10/11/94	BSA
C	RV'd CLEARENCES FOR TANK HEATER	10/22/98	BSA

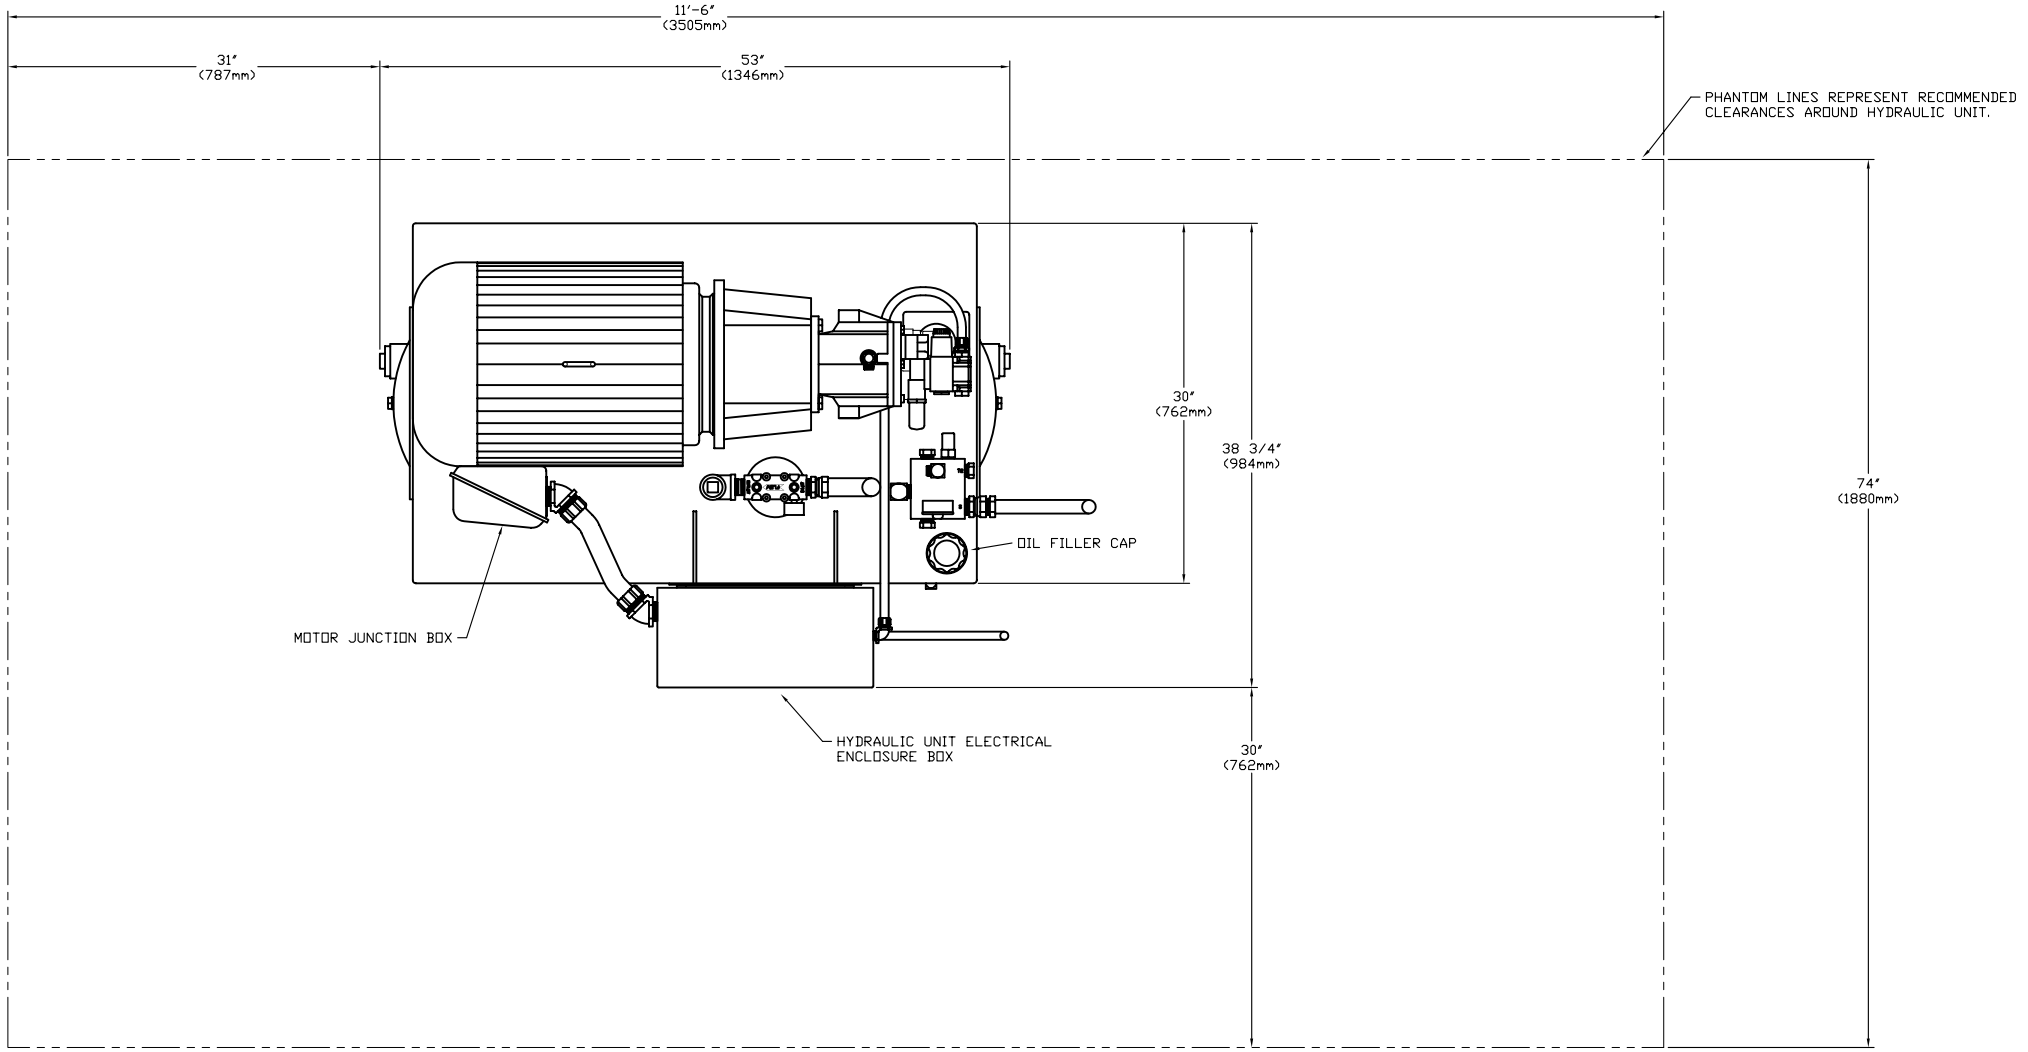

TOP VIEW

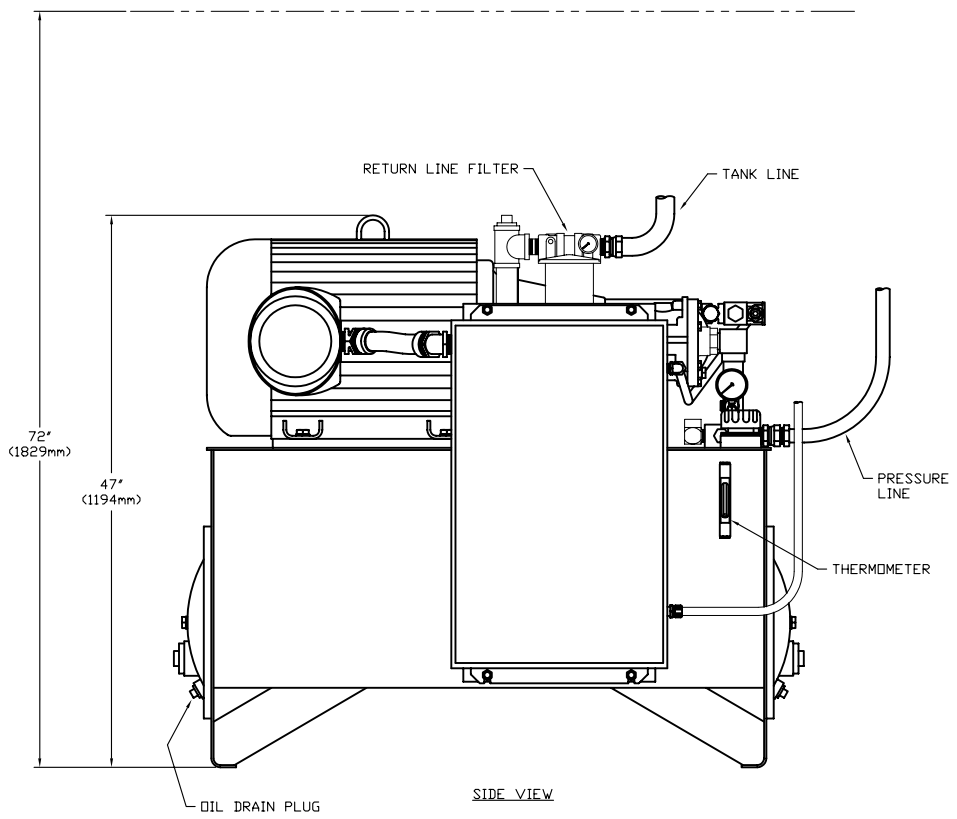

SIDE VIEW

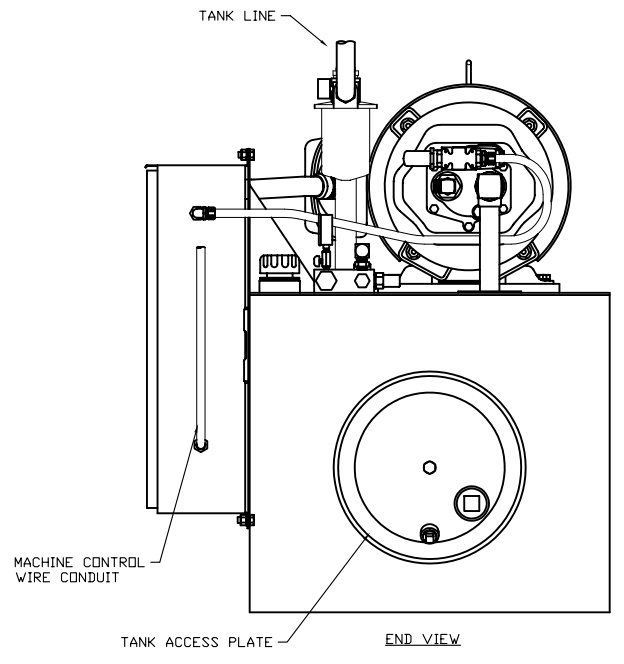

END VIEW

1. IT IS RECOMMENDED THAT THE HYDRAULIC UNIT BE PLACED IN AN ISOLATED ROOM, PREFERABLY LINED WITH A NOISE DAMPENING MATERIAL TO HELP REDUCE THE NOISE LEVEL IN THE GENERAL WORKING AREA. THIS ROOM MUST BE HEATED AND WELL VENTILATED. KEEP THE UNIT AS CLOSE AS POSSIBLE TO THE PIPE MACHINE IN ORDER TO KEEP LINE AND PRESSURE LOSSES TO A MINIMUM.
2. BOLT HYDRAULIC UNIT TO FLOOR BEFORE ROUTING INCOMING AND OUTGOING LINES. LOCATE HOLES IN FLOOR WITH HYDRAULIC UNIT IN PLACE.
3. PRESSURE LINE, TANK LINE, AND MACHINE CONTROL WIRE CONDUIT RUN FROM HYDRAULIC UNIT TO THE PIPE MACHINE. SEE SERVICE REQUIREMENTS DRAWING FOR DETAILS.
4. INCOMING HYDRAULIC UNIT ELECTRICAL POWER RUNS TO HYDRAULIC UNIT ELECTRICAL ENCLOSURE BOX. SEE SERVICE REQUIREMENTS DRAWING FOR DETAILS.

HAWKEYE CONCRETE PRODUCTS CO.
MEDIAPOLIS, IOWA

PIPE MACHINE HYDRAULIC UNIT PLACEMENT CLEARANCES

TOLERANCES (UNLESS SPECIFIED)
FRACTIONAL ±1/16 DECIMAL ±.05 ANGULAR ±1°

SCALE	DATE	DRAWN	ENGR		DRAWING NO.	ISSUE
1/8"=1"	1/22/1988	RDP	BSA		22432D	C